




Rheem Tankpak 1 comes with a single continuous flow water heater (CFWH), a storage tank, a pump, controller and an optional tank mounting bracket kit.


The Tankpak 1 units are available in internal (TPI01) and external (TPE01) models with natural or propane gas. All models can be mounted on a vertical wall (W). 872 Series or 872B or 862B Series can be mounted on the storage tank (F) (tank mounting bracket is supplied by Rheem).

Typical Installation

TANK MOUNT- FRONT VIEW

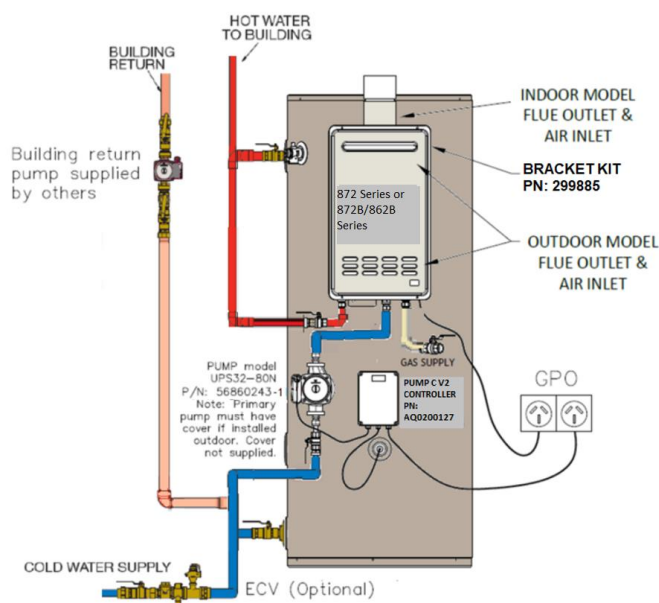

WALL MOUNT- FRONT VIEW

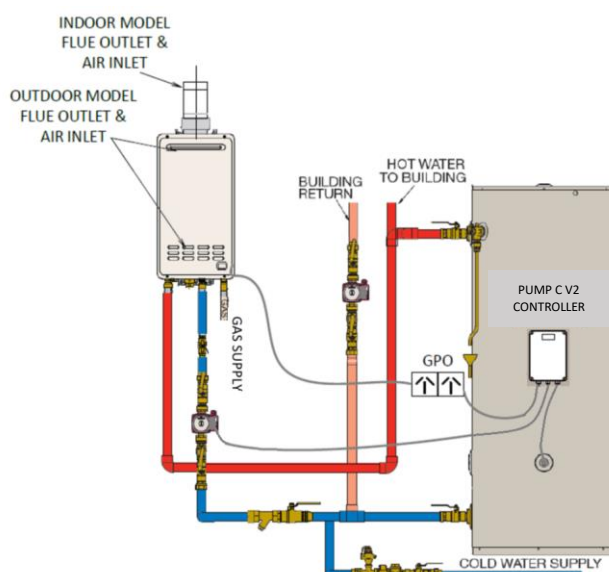

NOTE: Front clearances for continuous flow water heater (CFWH) are 600mm for indoor and 800mm for outdoor models.

Tankpak 1 models are supplied with tank, pump, controller and an optional tank mounting bracket kit separately.

Components

CFWH	Storage Tank	Pump	Controller	Bracket Kit (Optional)
Internal Model- 862627*F or 862B28*F	325L- 61034050 (VE) or	UPS32-80N 56860243-1	PUMP/C V2 Controller AQ0200127	TP01 Gas Boost Mounting Kit 299885
External Model- 872627*F or 872B28*F	325L- 6N325M0 (SS) (Not Available in WA) or 410L- 61043050			

Model Numbers (excluding gas type)

Wall Mount		Tank Mount	
TPE01*WS/1340	TPI01*WS/1340	TPE01*FS/1340	TPI01*FS/1340
TPE01*WS/1325S (excl. WA)	TPI01*WS/1325S (excl. WA)	TPE01*FS/1325S (excl. WA)	TPI01*FS/1325S (excl. WA)
TPE01*WS/1430	TPI01*WS/1430	TPE01*FS/1430	TPI01*FS/1430

*N= Natural Gas or P= Propane

Flue components are available for indoor installations. Please contact Rheem or see Owner's Guide and installations, available at www.rheem.com.au



TANKPAK 1 MODEL	INTERNAL	TPI01
	EXTERNAL	TPE01
Thermal Input	MJ/h	210
Recovery Rate at 50°C rise	L/hr	843
1 st Hour Capacity (325L)	Litres	1150
1 st Hour Capacity (410L)	Litres	1230
Mounting Options	Tank / Wall	
Storage Tanks	1x 610340 or 1x 6N0325 or 1x 610430	
Electrical Supply (240V/50Hz)	Amps	0.75 per CFWH
Pump Start Current	Amps	1.0 per Pump
Electrical Connection	1.8m 10A Plug & Lead per CFWH 1.8m 10A Plug & Lead per Pump C Controller	
PHWF & PHWR Pipe Size	mm	25
Natural Gas Pipe Size	mm	20
Propane Gas Pipe Size	mm	20
Weight Empty (incl. Tank, CFWH, pump & Controller)	kg	150 for VE Tanks 100 for SS Tank
Delivery Temperature	°C	Up to 82

CFWH Dimensions



EXTERNAL MODEL INTERNAL MODEL


RHEEM COMMERCIAL CONTINUOUS FLOW	EXTERNAL MODEL 872B Series	INTERNAL MODEL 862B Series
Height	mm 559	647
Width	mm 343	347
Depth	mm 260	285

Recommended TANKPAK Settings

PRODUCT	SET POINT	DIFFERENTIAL
CFWH	70°C	-
Controller	65°C	3
Pump Speed	3	-

Storage Tanks Dimensional Drawing

610 Series Tanks

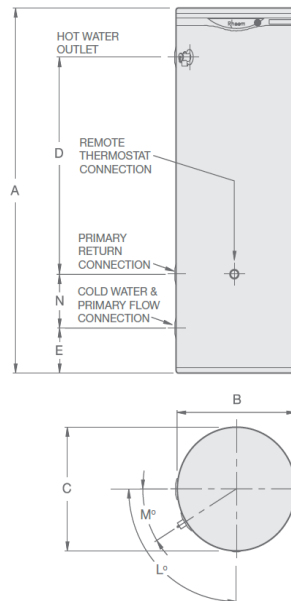

Model number		610 340	610 430
		vitreous enamel	
Storage capacity	Litres	325	410
Dimensions	A	mm 1640	1840
	B	mm 640	685
	C	mm 640	685
	D	mm 1008	1210
	E	mm 115	108
	F	mm -	-
	G	mm -	-
	H	mm -	-
	J	mm 290	273
	K	degrees -	-
	L	degrees 90°	84°
	M	degrees 32°	30°
	N	mm 290	273
Weight Empty	kg	96	117

6N0325M0- Induro SS Tank (Not Available in WA)

